



Kömmerling® profile system


Kömmerling PremiDoor 76

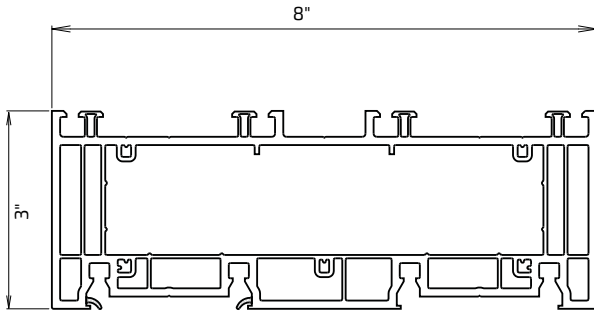

frame

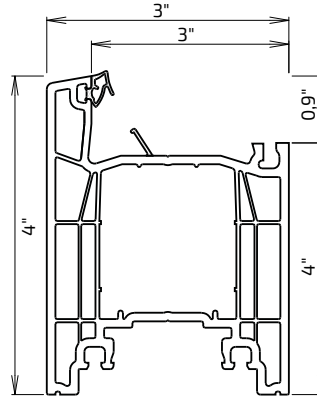

sash

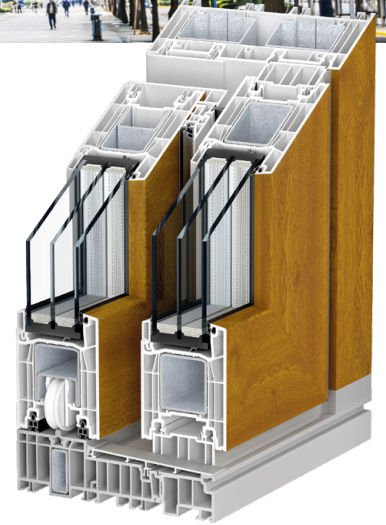

Kömmerling® PremiDoor is the latest addition to our Kömmerling® 76 mm range of products. Kömmerling® PremiDoor 76 is perfect for glazing large openings up to 6,5 m wide and 2,6 m high

chambers	mounting frame width	mounting sash width	thickness of insulating glass unit
5	179 mm	76 mm	16-50 mm
thermal conductivity Uf	sound insulation		air permeability
1,4 W/ (m²K)	45 dB		4 class
wind loads resistance	water tightness		safety class
up to C2/B3	up to 9A		up to RC2 (WK2)

Profile system advantages


Ease of opening and closing of the Kömmerling® PremiDoor 76 sliding doors is guaranteed by the spring system integrated in the closing mechanism: in every case the handle turns without effort.

The minimal height of the threshold makes moving around comfortable. The sealing performance is higher than that of any brush-sealed system

Color palette

decorative
tape RENOLIT
EXOFOL PX

the color of lamination

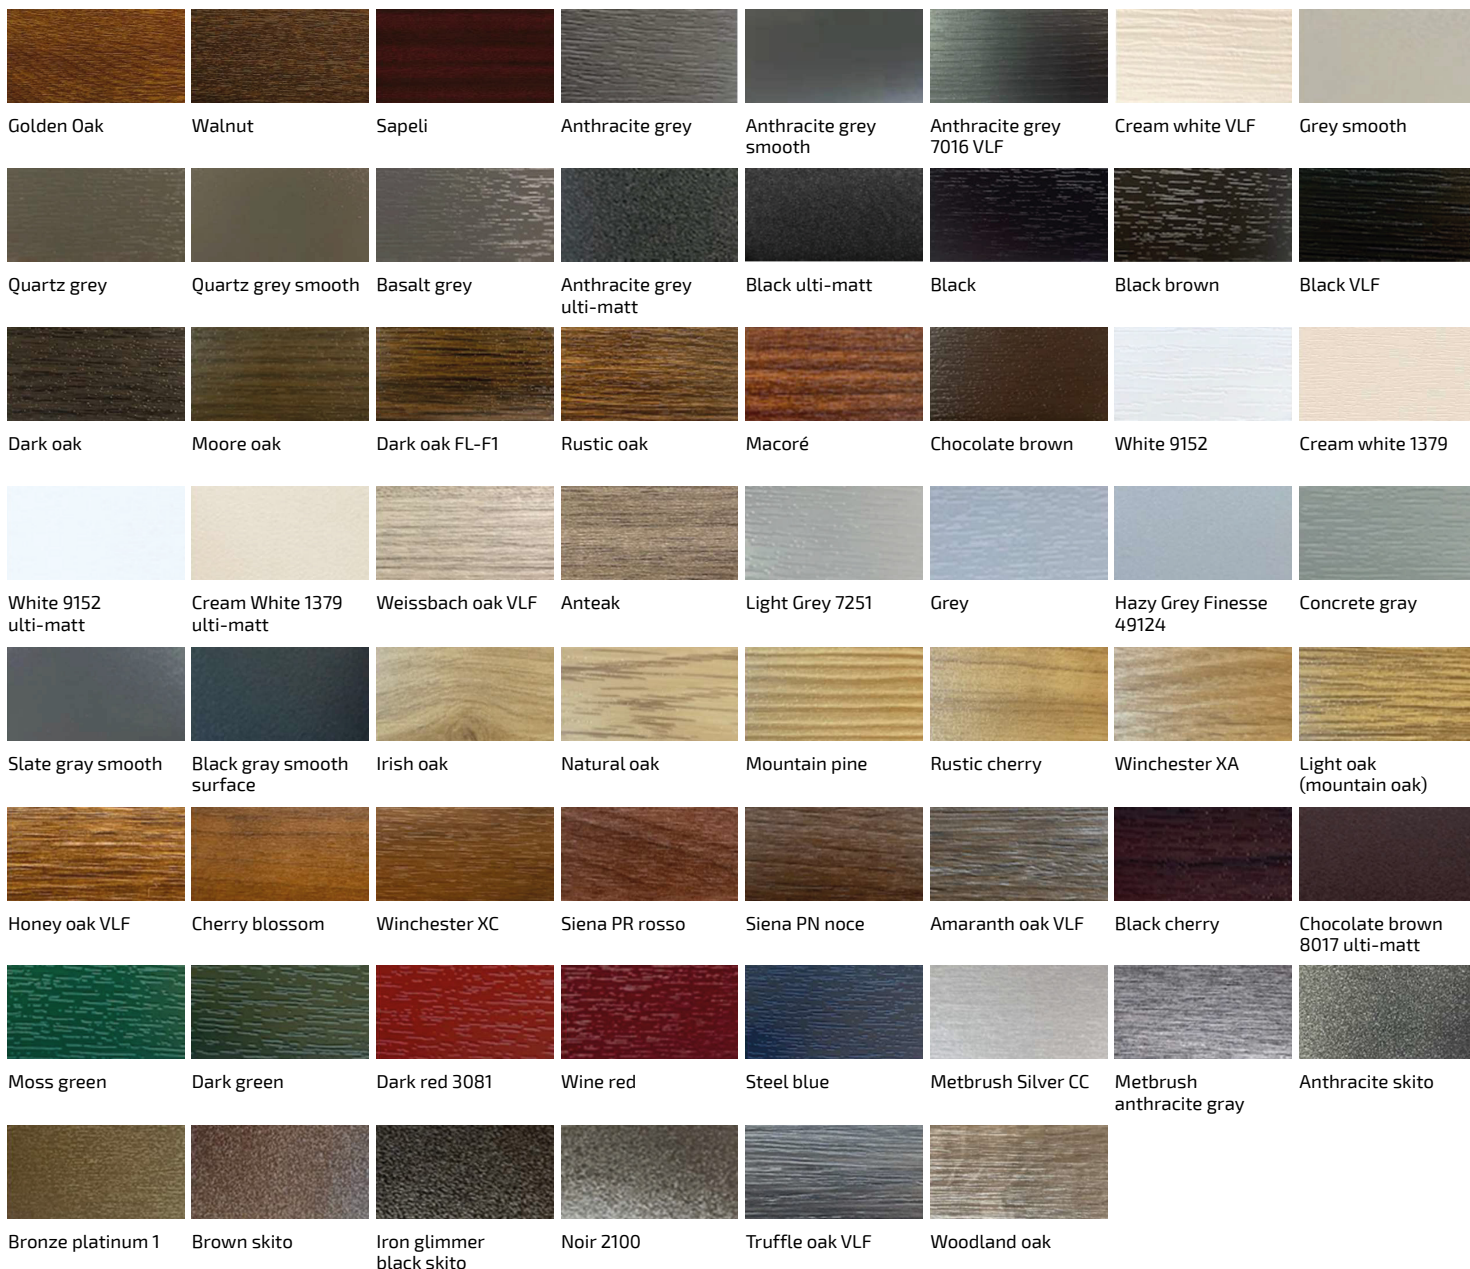

the color of sealing strip



the color of the structure body

