


Kömmerling® profile system

# Kömmerling PremiSlide 76

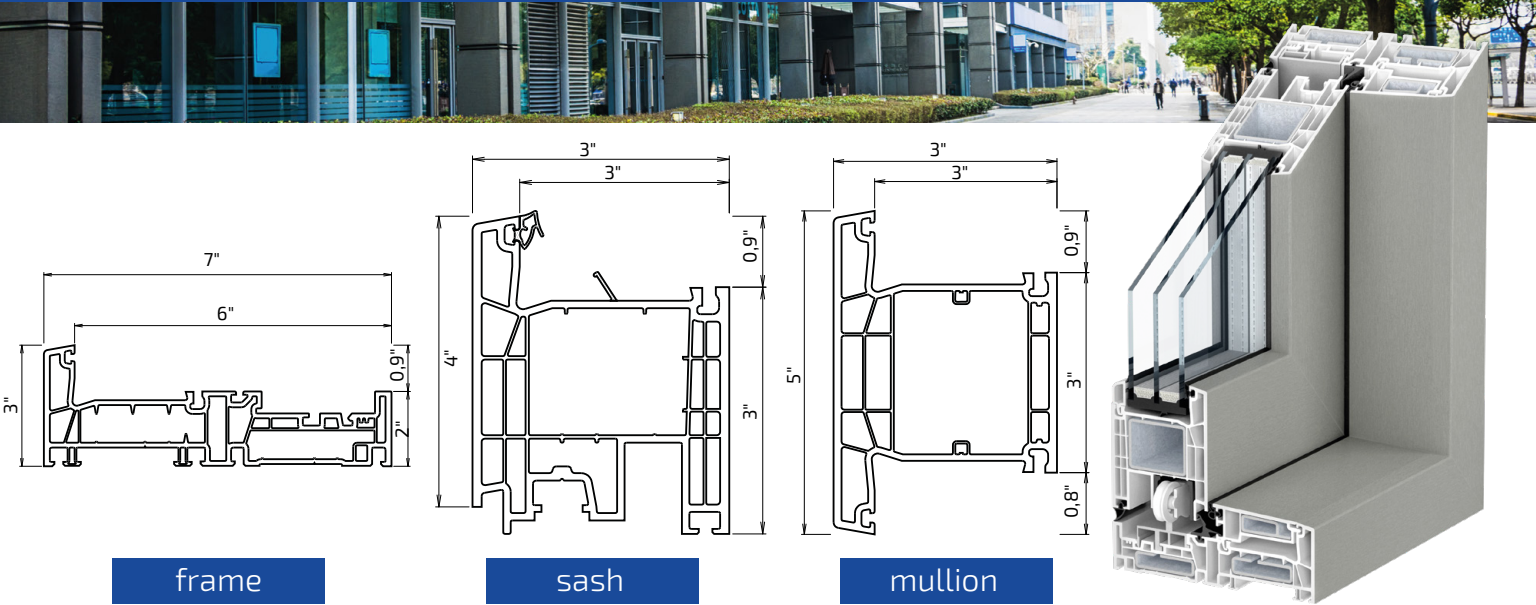

The innovative sliding system, Kömmerling® PremiSlide 76 is ideal for glazing large openings. The open sash does not protrude beyond the window plane, allowing for maximum space saving

chambers	mounting frame width	mounting sash width
<b>5</b>	<b>158 mm</b>	<b>76 mm</b>
thickness of insulating glass unit	thermal conductivity $U_f$	air permeability
<b>16-50 mm</b>	<b>1,3 W/ (m<sup>2</sup>K)</b>	<b>4 class</b>
wind loads resistance	water tightness	safety class
<b>up to C4/B5</b>	<b>up to 9A</b>	<b>up to RC2 (WK2)</b>

## Profile system advantages


The high degree of air-tightness when closing the sash ensures excellent thermal and sound insulation values. Even large sashes move easily and smoothly.

When the sash is set in ventilation mode, the burglar-proof characteristics of the fittings are preserved — which increases the overall security of the construction. Kömmerling® PremiSlide 76 sliding doors offer maximum comfort and maximum space availability

# Kömmerling PremiSlide 76 Color palette

decorative  
tape RENOLIT  
EXOFOL PX

## the color of lamination

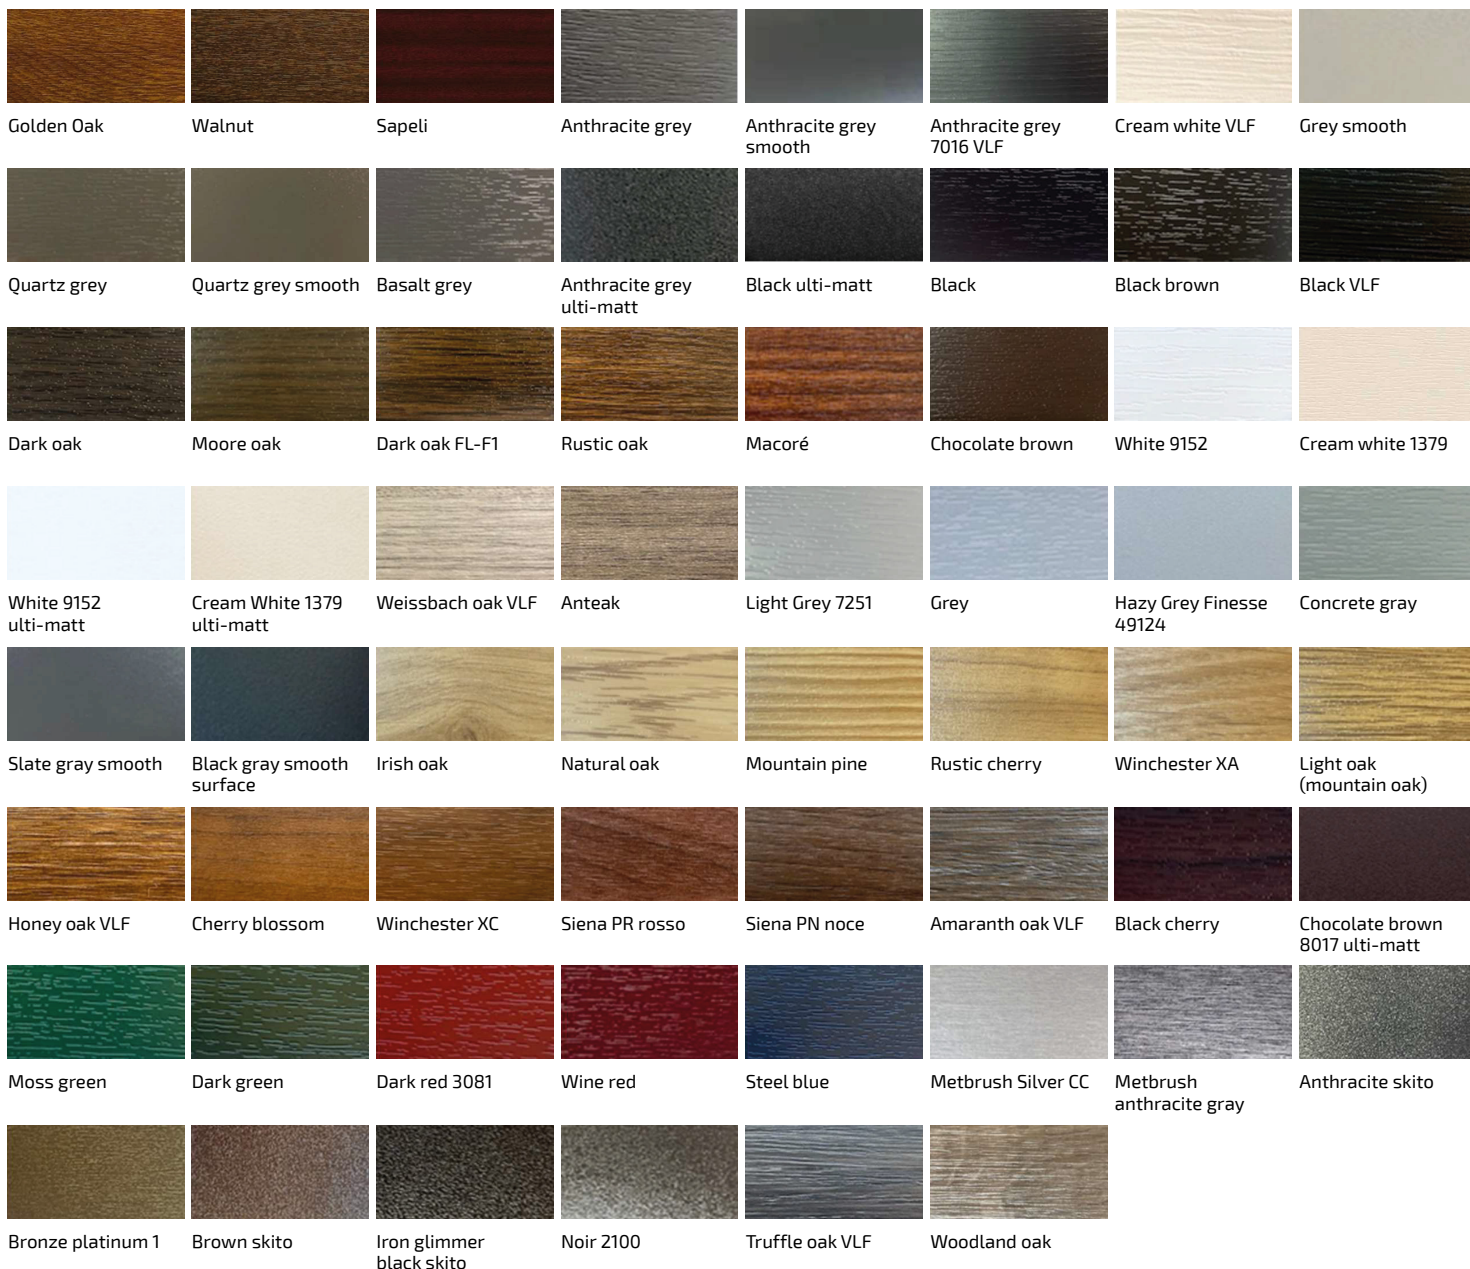

## the color of sealing strip



## the color of the structure body

